
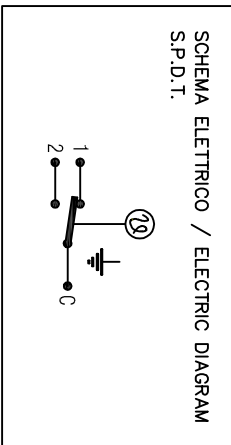


ETICHETTA INDELEBILE PER RIFERIMENTO UNICO

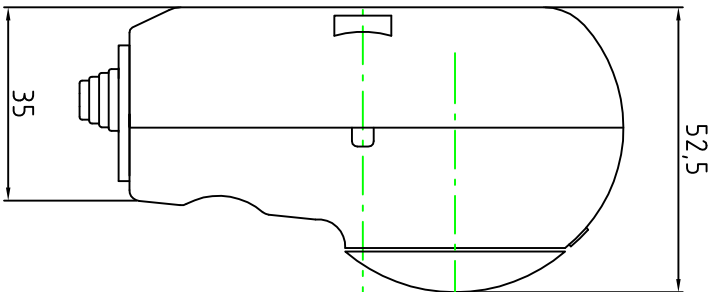

DATI TECNICI - TECHNICAL DATA

SCALA RANGE:	0/90°C
DIFFERENZIALE / DIFFERENTIAL:	4 ± 2,5°C
TOLL. VALORI F.S.	± 3°C
CAPILLARE / CAPILLARY:	MM 1500 RAME / COPPER OR INOX CAPILLARY
INVOLUCRO MANOPOLA / CASE:	LIGHT BLUE PANTONE 2995C
SERIGRAFIA / DIAL:	RED KNOB - WHITE NUMBERS
PORTATA CONTATTI / BREAKING CAPACITY:	C1 15(2,5)A 400 VAC - C2 2,5(0,4)A 400 VAC
MINIMUM CORRENT:	200 mA
INSULATION RESISTANCE:	> 100 M ohm
TEST DI VITA / LIFE OF PRODUCT:	100.000 CICLI / CYCLES
MAX °C SOPP. CORPO / MAX °C CASE	80°C
GRADO TENUTA / IP GRADE:	IP 40

MODIFICA	DOC.RIF.	DATA	APPARECCHIO ASSIEME	ARTH097	DISIGNATO A. SALA	APPROVATO SALA A.
1			PARTECIPARE	ARTH097	SCALA 1:1	DATA 11/11/2011
2			MATERIALE			
3			TRATTAMENTO			
4			NOTE			
5						

ARTHERHO

ARTH097